


Internal central division

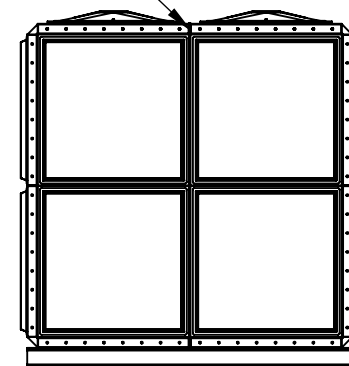

TITLE  
**PW.3x2x2.TIF.DIV.AG**

DRAWN BY  
**C.MORRIS**

DATE  
**01/02/2023**

CUSTOMER  
**CUSTOMER**

**NOTE:**  
 Tanks Direct sectional tanks must be fully supported on a flat, level & continuous foundation which provides structural support to the tank when full to a maximum capacity. It is essential that the installer and/or user refers to the conditions of the installation document prior to the installation of the tank. Under no circumstances should any part of the tank structure be used to provide support to pipework and/or any ancillary items.

ALL DIMENSIONS +/- 5mm  
 UNLESS OTHERWISE STATED

**DESCRIPTION:**  
 PW.3x2x2.TIF.DIV. Sectional cold water storage tank c/w access manways to provide an AG Air gap.

A4

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
23/01/2023	A	FIRST ISSUE

**TANK SPECIFICATION :**

INTERNAL DIMENSIONS	3150 x 2150 x 2150mm
EXTERNAL DIMENSIONS	3224 x 2234 x 2351mm
NOM. CAPACITY	14,560 Litres
INSULATION THICKNESS	38mm
MATERIAL	Hot press moulded GRP

SCALE:1:50

SHEET 1 OF 1