

Water Management Solutions

  
Kingspan.



**Klargester**

# BioFicient<sup>®</sup> Small Sewage Treatment Plant



[kingspan.co.uk/klargester](http://kingspan.co.uk/klargester)

  
**Kingspan.**

# Klargester BioFicient® Small Sewage Treatment Plant

Suitable for homes with up to 30 people, the BioFicient is manufactured from quality materials and uses aerated technology to deliver a high level of water discharge quality.

### Product Benefits:

-  Low level visibility with a lockable child-proof cover – safer for children and pets.
-  Suitable for installation in traffic areas (structural advice required).
-  Supplied with a control panel, alarm and beacon (as standard).
-  Easy to install and operate.
-  Suitable for shallow dig applications
-  Low energy compressor. Integral pump option available for BioFicient 1,3,4.

### Applications:


The Klargester Domestic BioFicient® 1-6 range is suitable for use across the following applications:



### Performance and Compliance

- > Third party certified to BS EN 12566-3 European standard.
- > NH4 (ammonia) removal.
- > Fully CE marked in line with the CPR 2013.

Integral pump option available for BioFicient models 1,3,4\*

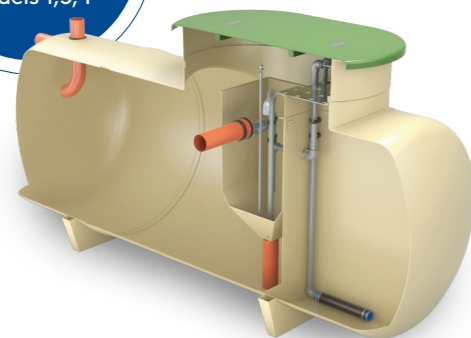

01

### Primary Chamber


Raw sewage gravitates to the unit where it is received in the primary settlement zone. Here, gross solids and other social debris settle to the bottom of the tank where they remain until the tank requires desludging. Settled sewage is displaced from primary zone and enters the first of two sequential moving aerated media reactors.

### Technical Specifications

Model Reference	BioFicient 1	BioFicient 3	BioFicient 4	BioFicient 5	BioFicient 6
Population Equivalent	6	10	15	20	30
Overall Diameter (mm)	1,540	1,425	1,920	1,920	1,920
Length (mm)	2,500	3,770	3,230	4,390	6,220
Depth (mm)	1,794-2,104	1,830/2,330/2,830	2,300/2,800/3,300	2,300/2,800/3,300	2,300/2,800/3,300
Inlet Invert (mm)	500-810/500-810*	500/1,000/1,500	500/1,000/1,500	500/1,000/1,500	500/1,000/1,500
Outlet Invert (mm)	600-910/555-865*	620/1,200/1,620	630/1,130/1,630	630/1,130/1,630	630/1,130/1,630
Material	MDPE	GRP	GRP	GRP	GRP
Blower Ratings	50W	95W	115W	180W	225W
Cover sizes	600	1,440/900	1,440/900+600**	1,440/900+600**	1,440/900+600**

Note: Optional inlet depth down to 1800mm  
\*BioFicient IPS models only (Outlet Depth 320mm) | \*\*BioFicient 4, 5, 6 have two shafts.

Unsure whether you need a gravity or pumped system? Talk to our expert Kingspan Klargester team on [klargesterguarantee@kingspan.com](mailto:klargesterguarantee@kingspan.com) or call 01296 633033.

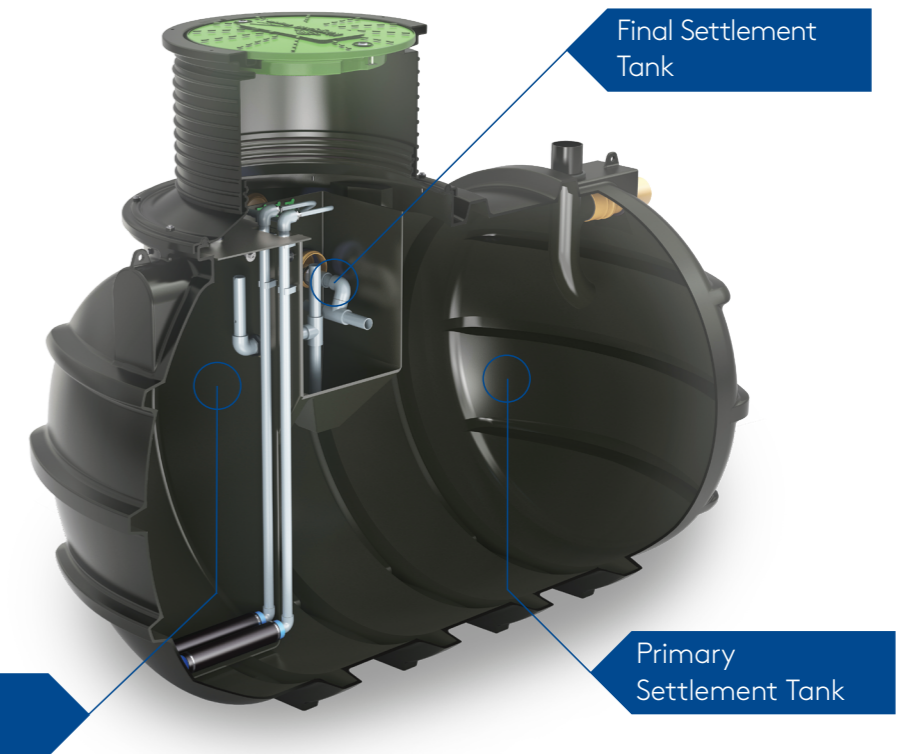

02

### Biozone 1 & 2

Solids are broken down by air agitated media in the Biozone. Media and liquid circulation in the Biozone is achieved through the use of a compressor and diffuser, which introduces fresh air into each compartment. The liquor is constantly re-circulated and contacts the moving media and as it does so, it is purified by the micro organisms growing on the surface of the media and within the moving liquor. Excess growth of biomass is shed as solid particles into the liquor.

03

### Final Settlement Tank

Where fine solids are settled out. The final effluent is discharged via either gravity outlet or IPS (Integral Pump System) chamber. With regulatory approval, it is suitable for discharge to a watercourse or drainage field.

3

YR WARRANTY PERIOD

Register your warranty online at [kingspan.co.uk/klargesterguarantee](http://kingspan.co.uk/klargesterguarantee) to enjoy an extended 3 year warranty period\*\*  
\*\* Terms and conditions apply. Ask our team for details

\* IPS option available for models BFG3-6. Models BFP1, BFG3-6 & BFP1 offer an 800mm invert option.

---

# Contact Details

---

## UK

**Kingspan Water & Energy Ltd.**

College Road North  
Aston Clinton | Aylesbury  
Buckinghamshire | HP22 5EW

T: +44 (0) 1296 633 000

F: +44 (0) 1296 633 001

E: [klargester@kingspan.com](mailto:klargester@kingspan.com)

[www.kingspan.co.uk/klargester](http://www.kingspan.co.uk/klargester)

We take every care to ensure that the information in this document is accurate at the point of publication. Dimensions may vary (within a small parameter) due to manufacturing process variations or environmental conditions. All images are for illustration purposes only and, along with dimensions, should not be taken as binding. The actual product may vary and aspects such as equipment specification/colour may differ. To ensure you are viewing the most recent and accurate product information, please visit this link: <https://www.kingspan.com/gb/en-gb/products/water-management/domestic-sewage-treatment-plants> ©Kingspan and the Lion Device are Registered Trademarks of the Kingspan Group in the UK, Ireland and other countries. All rights reserved. Registered in Country No.NI017631. Registered Office: 180 Gilford Road, Portadown, Co. Armagh, BT635LF. VAT GB412 5124 03

