
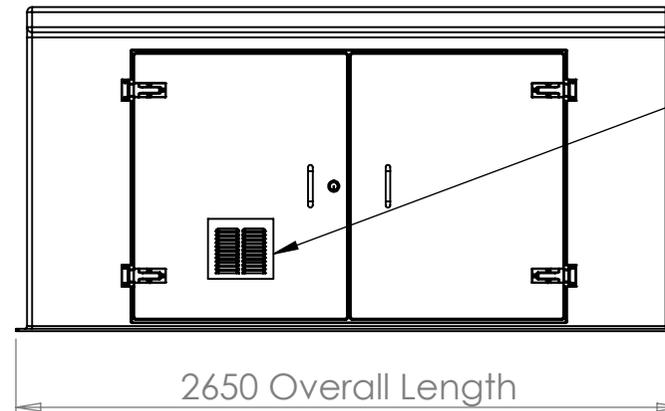


Sloped roof

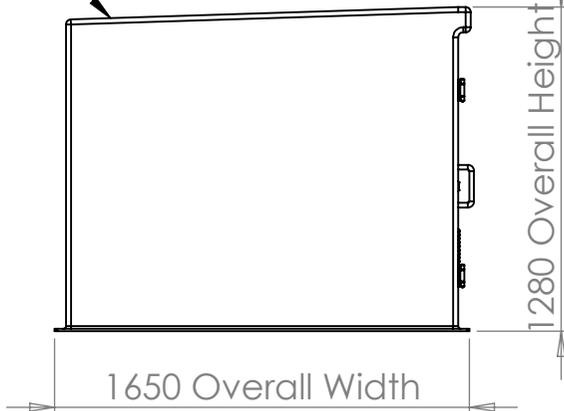

Double door with Louvered vent

TITLE
PWH4500

DRAWN BY J. Ellison DATE 17/12/2021

Foundation Requirements:
The foundation area must be no less in length and width than the external dimensions of the enclosure. The foundation must be constructed so as to be capable of supporting the weight of the enclosure and equipment contained within it. The foundation must be continuous and be no more than ±2mm over any given metre.

DESCRIPTION:
PWH4500 c/w Louvered vent

DATE	VERSION	NOTES
17/12/2021	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	2500 x 1500 x 1200mm
EXTERNAL DIMENSIONS	2650 x 1650 x 1280mm
NOM. CAPACITY	4500 Litres
DRY WEIGHT	250 KG
INSULATION THICKNESS	25mm
MATERIAL	GRP




CUSTOMER CUSTOMER

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

A4 ALL DIMENSIONS IN MM DO NOT SCALE

SCALE:1:30 SHEET 1 OF 2

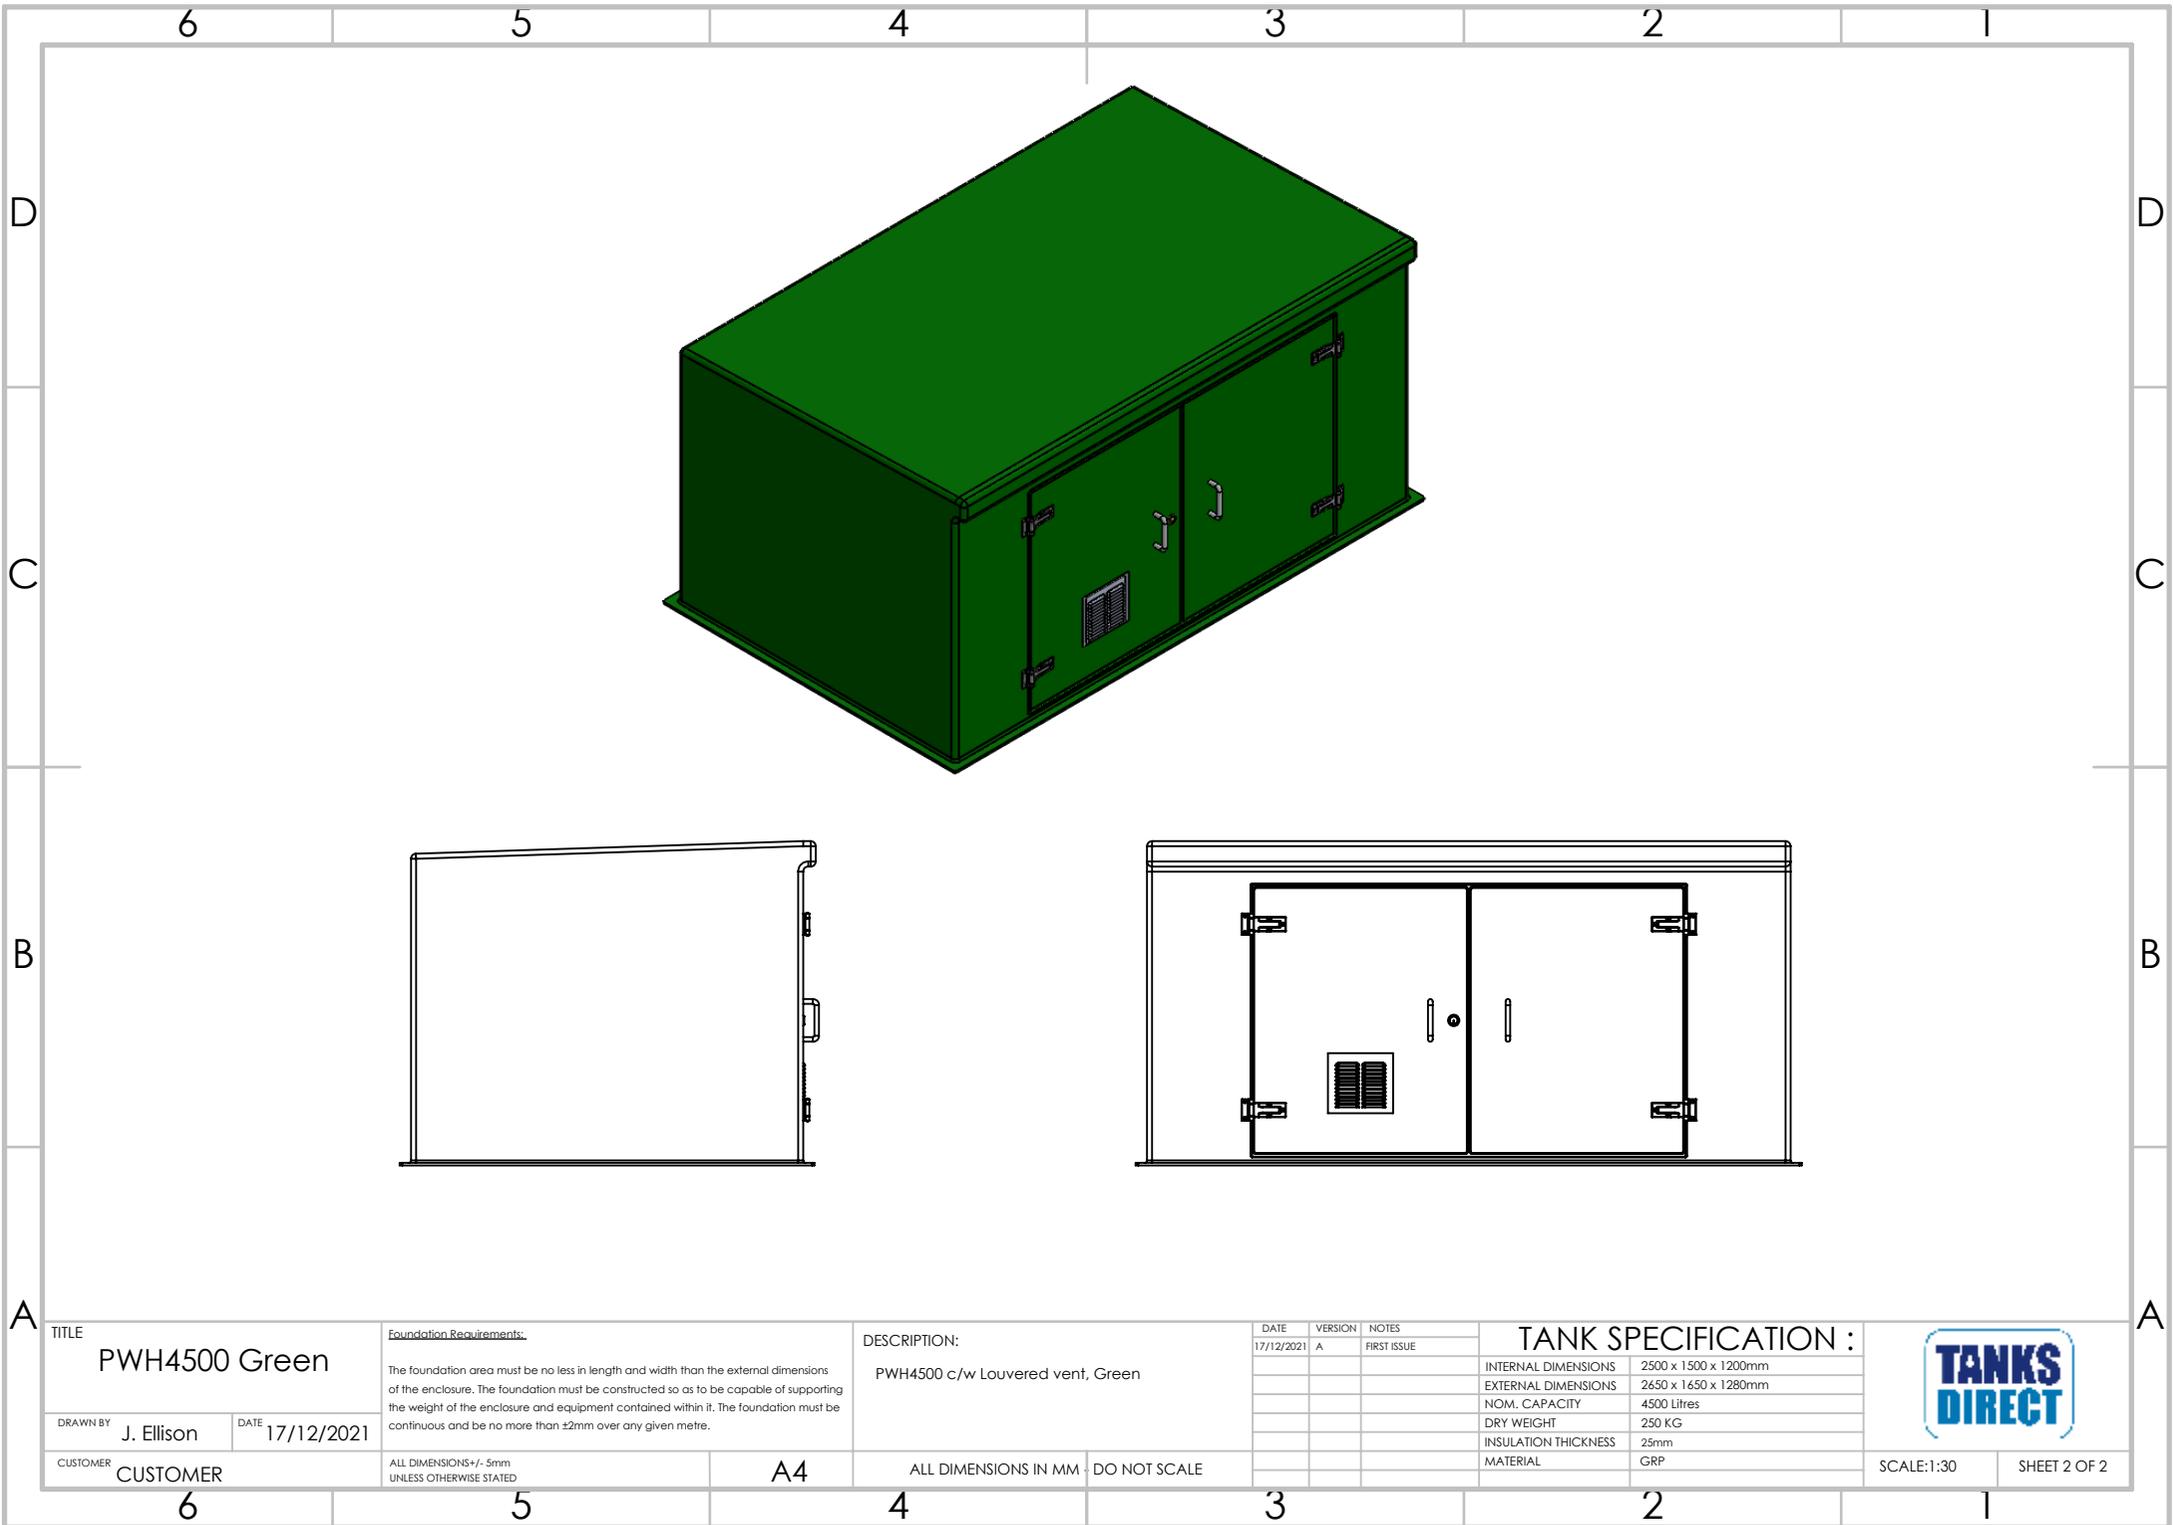

TITLE
PWH4500 Green

DRAWN BY
J. Ellison

DATE
17/12/2021

CUSTOMER
CUSTOMER

Foundation Requirements:
 The foundation area must be no less in length and width than the external dimensions of the enclosure. The foundation must be constructed so as to be capable of supporting the weight of the enclosure and equipment contained within it. The foundation must be continuous and be no more than ±2mm over any given metre.

ALL DIMENSIONS +/- 5mm
 UNLESS OTHERWISE STATED

DESCRIPTION:
PWH4500 c/w Louvered vent, Green

A4

ALL DIMENSIONS IN MM DO NOT SCALE

DATE	VERSION	NOTES
17/12/2021	A	FIRST ISSUE

TANK SPECIFICATION :

INTERNAL DIMENSIONS	2500 x 1500 x 1200mm
EXTERNAL DIMENSIONS	2650 x 1650 x 1280mm
NOM. CAPACITY	4500 Litres
DRY WEIGHT	250 KG
INSULATION THICKNESS	25mm
MATERIAL	GRP



SCALE:1:30 SHEET 2 OF 2