

enviro et series

Oil-Free - Linear Diaphragm Pump

Charles Austen
Pumps Ltd



Performance

- 250 to 300 litres/min flow



- Specially formulated diaphragm material for extended life
- No reduction in performance due to no wearing parts
- Robust and compact construction – weatherproof
- Easy to service with competitively priced spares kit
- Suited to intermittent or continuous duty applications
- Ideal replacement to rotary vane pumps or small side channel blowers
- Eliminates the need for multiple pumps on large tank installs
- UL and CE approved

Enviro accessories



Envirosure alarm





Diffuser



Manifold

Application Ideas

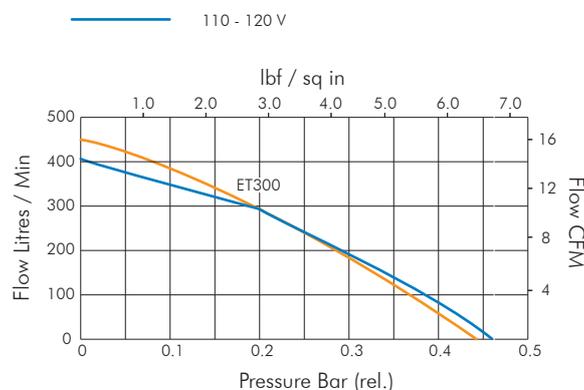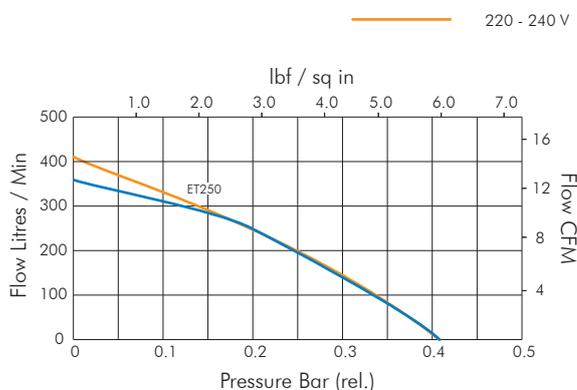


Tel: +44 (0)1932 355277
Email: info@charlesausten.com
Web: www.charlesausten.com





Performance/Technical

enviro et series

Oil-Free - Linear Diaphragm Pump

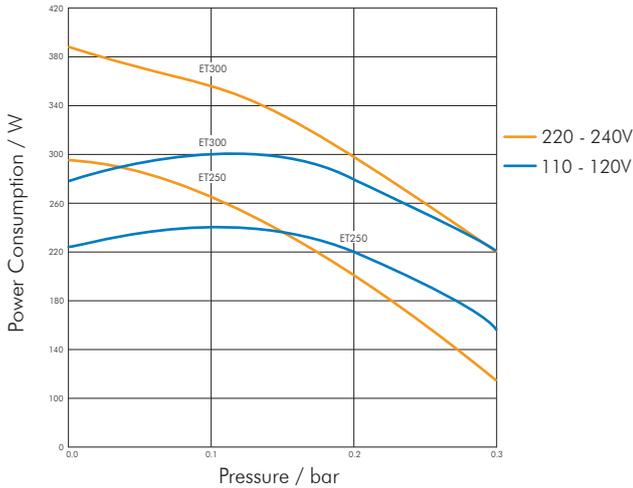

Dimensions are in mm, please see table for measurement in inches

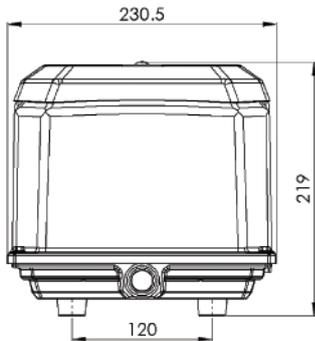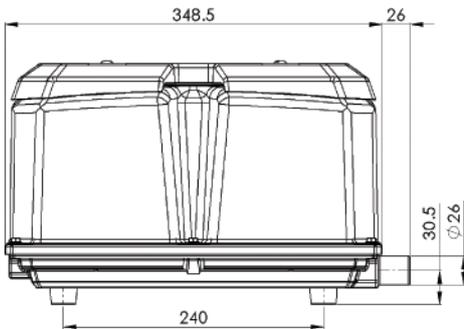

Distributed by:



Model no.	Performance	Noise Level dBA	Power Consumption
	Flow (l/min) @pressure (bar)		
ET250	250 @ 0.20	40.0	221
ET300	300 @ 0.20	40.0	275

Connections

Outlet connector 26mm (1.01"), also supplied with a straight rubber connector which can be used to increase pipe size to 29mm (1.14") ID

Dimensions

Model no.	Dimensions mm (inch)				Weight kg
	Length	Width	Height	Connector	
ET250	348.5 (13.72)	230.5 (9.07)	219 (8.62)	26 (1.02)	17.5
ET300	348.5 (13.72)	230.5 (9.07)	219 (8.62)	26 (1.02)	18

Other Models in the Enviro Range



Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application.

For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.

S30-306

