


APPROX. DRY WEIGHTS (KG)	
600mm INVERT	1660
1100mm INVERT	1825

NOTES

1. BIODISC TANK AND COVER ARE MANUFACTURED IN GLASS REINFORCED POLYESTER (G.R.P.). COVER IS FINISHED IN GREEN TO B.S.4800 TINT 12B:25
2. ELECTRICAL SUPPLY: 240 VOLTS, 3amps. SINGLE PHASE (THREE PHASE OPTIONAL) CONTROL PANEL SUPPLIED.
3. BIODISC MUST BE LIFTED BY THE LIFTING POSITIONS PROVIDED.
4. FOR INSTALLATION, MAINTENANCE AND DESILUDGE DETAILS REFER TO PROCEDURE DOCUMENTS SUPPLIED WITH UNIT.
5. 600 INLET INVERT UNIT OPTION SHOWN. 1100 INLET INVERT / 1185 OUTLET INVERT OPTION AVAILABLE.

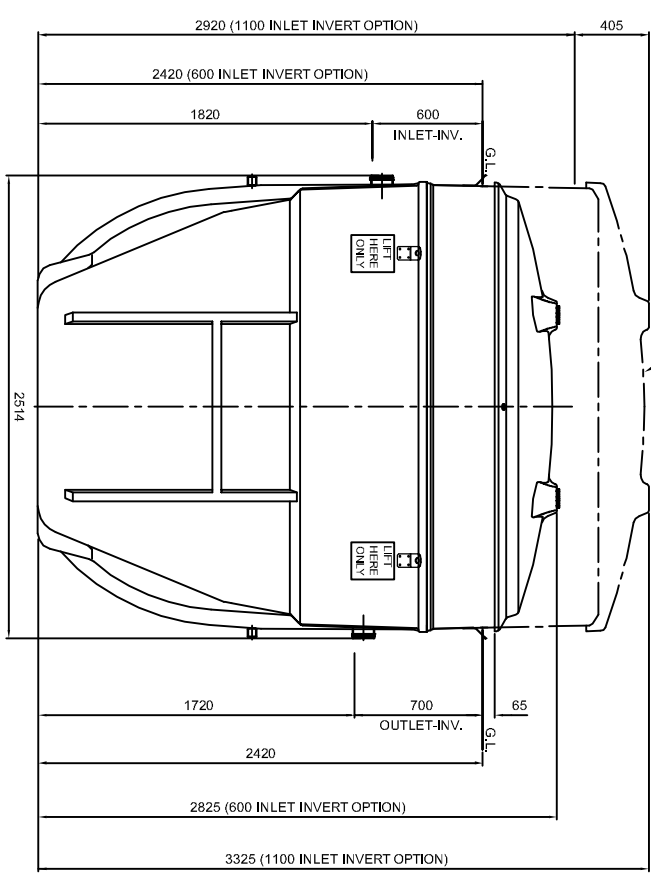

ISSUE	DATE	BY	DESCRIPTION
5	13.03.19	TK	1100 INVERT ADDED
4	01/12/17	WMD	CG1410 - LIFTING INSTRUCTIONS MODIFIED
3	24/04/18	LS	CG1235 - INLET / OUTLET DIM S FOR BI-BL BIODISCS
2	19/11/12	LS	CG1104
1	17.05.10	J.C	INITIAL ISSUE CG941

Kingspan
Environmental

ALL DIMENSIONS ARE IN MILLIMETRES - DO NOT SCALE

EG BIODISC
GENERAL
DIMENSIONS

SCALE	1:15	SHEET SIZE	A1
DRAWING No.	DS0499P	REVISE	5

This drawing is copyright and may not be reproduced or used without the written permission of Kingspan. Kingspan reserves the right to change specifications without notice.

