


Internal central division

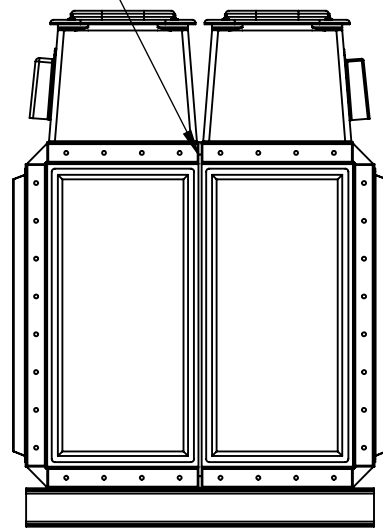

TITLE  
PW.1x1x1.TIF.DIV.AB

DRAWN BY J. Ellison DATE 01/02/2023

CUSTOMER CUSTOMER

NOTE:  
Tanks Direct sectional tanks must be fully supported on a flat, level & continuous foundation which provides structural support to the tank when full to a maximum capacity. It is essential that the installer and/or user refers to the conditions of the installation document prior to the installation of the tank. Under no circumstances should any part of the tank structure be used to provide support to pipework and/or any ancillary items.

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:  
PW.1x1x1.TIF.DIV Sectional cold water storage tank c/w raised float valve housing to provide an AB Air gap

A4 ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
23/01/2023	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	1150 x 1150 x 1150mm
EXTERNAL DIMENSIONS	1234 x 1204 x 1706mm
NOM. CAPACITY	1520 Litres
INSULATION THICKNESS	38mm
MATERIAL	Hot press moulded GRP

**TANKS DIRECT**

SCALE:1:25 SHEET 1 OF 1