


Internal central division

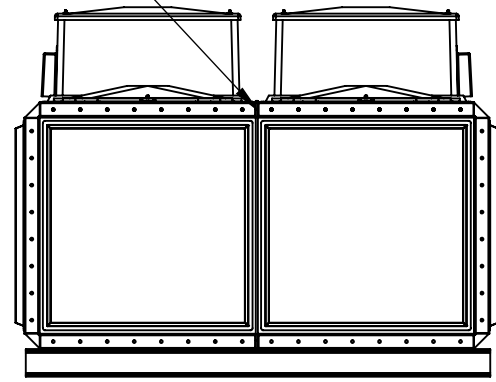

TITLE  
PW.2.5x2x1.TIF.DIV.AB

DRAWN BY J. Ellison DATE 01/02/2023  
CUSTOMER CUSTOMER

NOTE:  
Tanks Direct sectional tanks must be fully supported on a flat, level & continuous foundation which provides structural support to the tank when full to a maximum capacity. It is essential that the installer and/or user refers to the conditions of the installation document prior to the installation of the tank. Under no circumstances should any part of the tank structure be used to provide support to pipework and/or any ancillary items.

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:  
PW.2.5x2x1.TIF.DIV Sectional cold water storage tank c/w raised float valve housings to provide an AB Air gap

A4 ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
26/01/2023	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	2650 x 2150 x 1150mm
EXTERNAL DIMENSIONS	2724 x 2224 x 1710mm
NOM. CAPACITY	6552 Litres
INSULATION THICKNESS	38mm
MATERIAL	Hot press moulded GRP



SCALE:1:35 SHEET 1 OF 1