


Internal central division

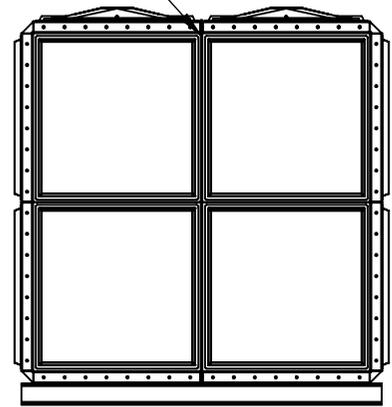

TITLE  
PW.2.5x2x2.TIF.DIV.AG

NOTE:  
Tanks Direct sectional tanks must be fully supported on a flat, level & continuous foundation which provides structural support to the tank when full to a maximum capacity. It is essential that the installer and/or user refers to the conditions of the installation document prior to the installation of the tank. Under no circumstances should any part of the tank structure be used to provide support to pipework and/or any ancillary items.

DESCRIPTION:  
PW.2.5x2x2.TIF.DIV. Sectional cold water storage tank c/w access manways to provide an AG Air gap.

DATE	VERSION	NOTES
27/01/2023	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	2650 x 2150 x 2150mm
EXTERNAL DIMENSIONS	2724 x 2234 x 2351mm
NOM. CAPACITY	12,249 Litres
INSULATION THICKNESS	38mm
MATERIAL	Hot press moulded GRP



DRAWN BY C.MORRIS DATE 01/02/2023  
CUSTOMER CUSTOMER

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

A4 ALL DIMENSIONS IN MM - DO NOT SCALE

SCALE:1:45

SHEET 1 OF 1