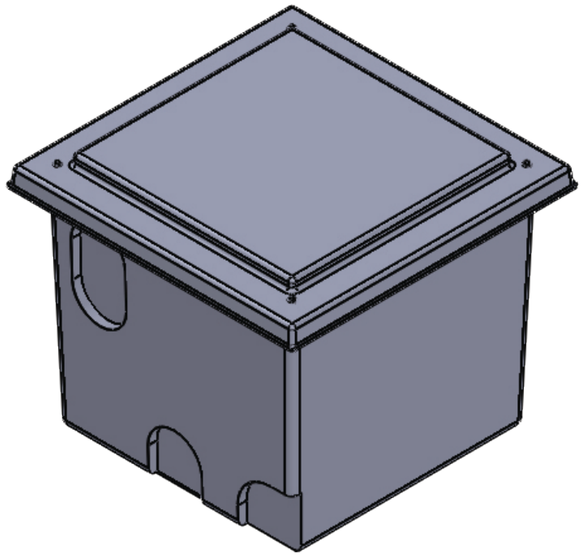

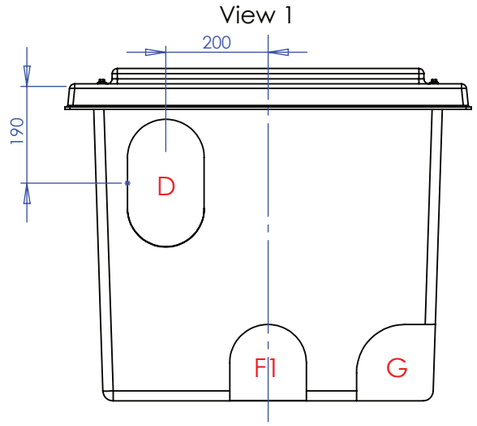

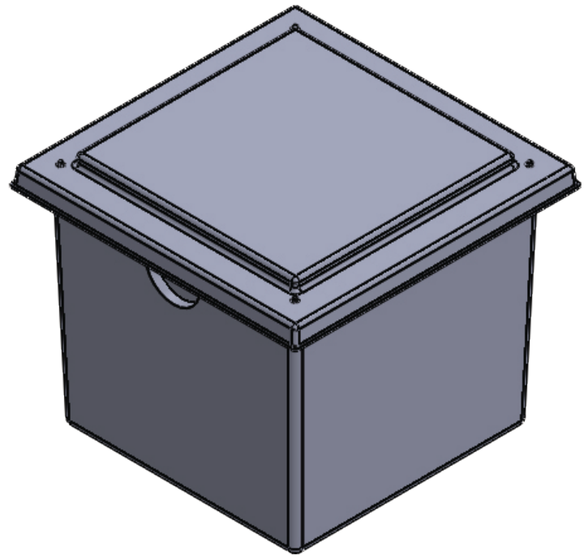

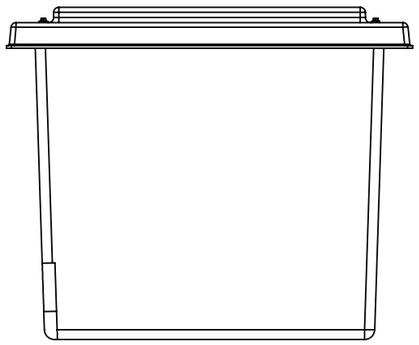

View 4

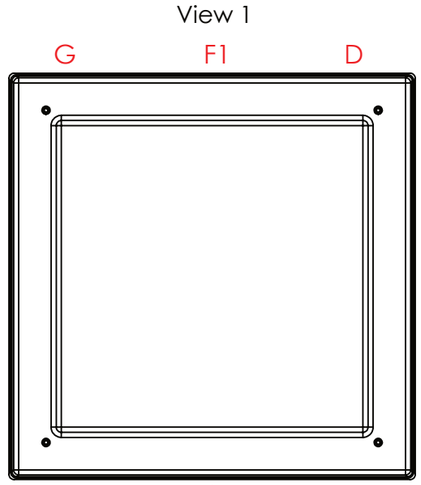

View 3

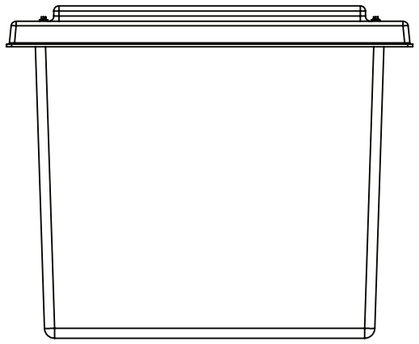

View 2

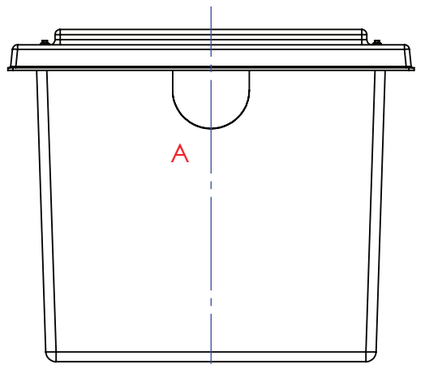

View 3

Connections:

A - Inlet	1 No pad T6 only
B - Lid vent	None
D - Overflow	1 No pad T2 only
F1 - Outlet	1 No pad T6 only
G - Drain	1 No pad T6 only

Drawing Approval Date	
Name	
Signature	

I am signing to approve this drawing to progress my order in the build program. I accept that I cannot cancel this order following my signature of approval.

RUBBED DOWN BY | PRINT NAME

TITLE: STANDARD POSITIONS

DRAWN BY: D.PRYJMACHUK | DATE: 27/03/2024

CUSTOMER: CUSTOMER

NOTE:
All tanks must be fully supported on a flat,level & continuous foundation providing structural support to the tank when full to maximum operating capacity.It is essential that the user refers to the conditions of installation document prior to the installation of the tank.Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS+/- 5mm UNLESS OTHERWISE STATED | A3

DESCRIPTION: PW225.INS.AG

ALL DIMENSIONS IN MM - DO NOT SCALE

NOTES		TANK SPECIFICATION :	
DATE	21/08/2023		
FIRST ISSUE	XXX	INTERNAL DIMENSIONS	610 x 610 x 610mm
VERSION	XXX	EXTERNAL DIMENSIONS	805 x 805 x 649mm
		NOMINAL CAPACITY	225 Litres
		INSULATION THICKNESS	25mm
		STEEL BRACINGS	NONE
		ENCAPSULATED BASEBOARD	NONE
		TANK COLOUR	GREY - 00A05

TANKS DIRECT

SCALE:1:12 | SHEET 1 OF 1