


- Lightweight single piece rotational moulded HDPE construction
- Separates and retains Fats, Oils and Greases (FOG's)
- Unique hollow baffle and step design assists separation and retention
- Promotes clean and free running drains
- Conventional connections to Ø110 and Ø160 mm pipework
- Includes access/inspection cover as standard (pedestrian rated)
- Pipe inverts can be increased with conventional manhole risers

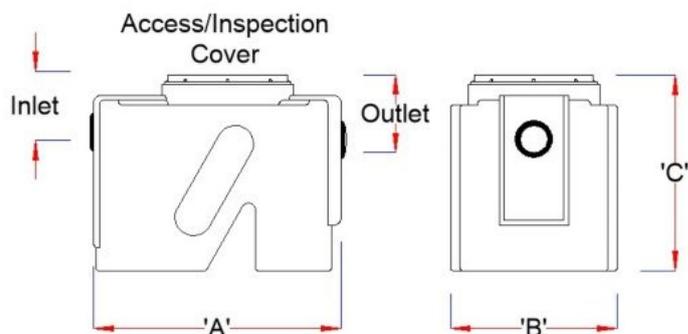

## Application

The Jumbo range of Grease Traps are designed primarily for the separation and retention of FOG's in kitchens and smaller catering establishments. As such they require regular inspection and maintenance including the removal of accumulated controlled waste for environmental disposal by registered waste carriers as per Environment Agency guidelines.

## Sizes and Specification

Model reference	Part no	Covers per day	Sludge Capacity (Litres)	Length 'A' (mm)	Width 'B' (mm)	Height 'C' (mm)	Inlet invert (mm)	Outlet invert (mm)	Pipe connections (mm)	Inspection cover
Jumbo Micro®	OEGT1	150	100	830	640	630	250	280	100/160	Ø450mm
Jumbo Mini®	OEGT2	300	250	1700	640	630	250	280	100/160	2 x Ø450
Jumbo Midi®	Jumbo	300	180	1100	720	860	310	345	100/160	Ø450mm
JUMBO2		600	400	2240	720	860	310	345	100/160	2 x Ø450

PB2247/14 © August 2017 Rev 5