

JBZ520



JBZ600






JBZ700



JBZ900



## FIXING POSITIONS

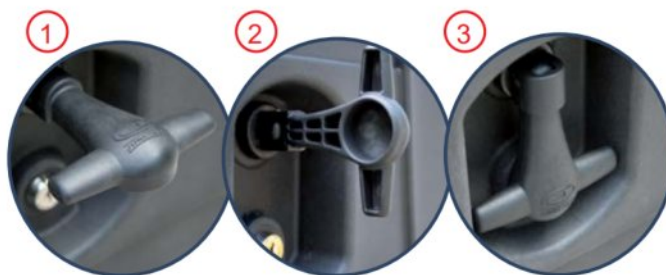

	(A) mm	(B) mm	(C) mm	(D) mm
JBZ520	470*	190	120	0
JBZ600	555*	280	105	0
JBZ700	745	280	105	30
JBZ900	945	280	105	30



	EAN-13	mm	mm	mm	mm	mm	mm	(E) mm	(F) mm	kg		
JBZ520	5055644200540	270	320	450	520	265	360	430	220	-	4	42
JBZ600	5055644205767	405	450	520	600	385	480	505	350	-	7	98
JBZ700	5055644202438	430	480	640	700	400	490	610	380	KIT35	8	132
JBZ900	5055644205774	430	480	840	900	395	490	810	380	KIT36	11	172

\* on request.

- Lid sits in a recess to minimize the potential for water ingress
- Additional protection through automotive grade rubber seal
- Lockable with key operated locks as standard
- Handles flip up into horizontal position and allow for easy unlocking even with gloved hands
- Handles with integrated Lock Dust Cover
- Handles flip down into a safety recess preventing them to rotate open
- Lid opens 180°
- No protruding parts
- May be incorporated in the side guard according to Regulation No 73 (UN/ECE)

