


2 NO 40mm Encapsulated Steel Bracings

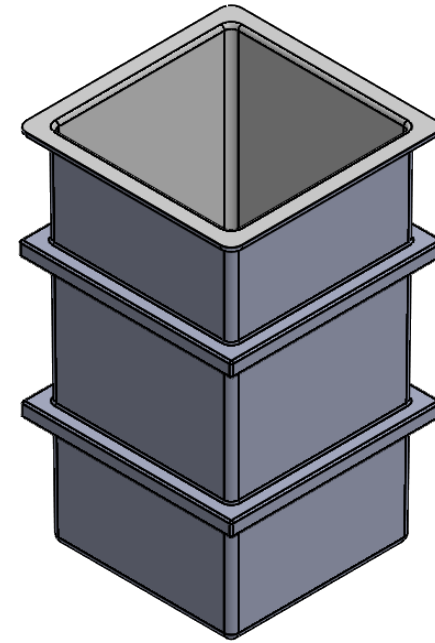

TITLE	
PW252.OPEN	
DRAWN BY	DATE
C.MORRIS	22/01/2018
CUSTOMER	
CUSTOMER	

NOTE:
All Tanks Direct tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items.
ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:
PW252.OPEN Cold water storage tank
ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
22/01/2018	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	500 x 500 x 1000mm
EXTERNAL DIMENSIONS	605 x 605 x 1005mm
NOM. CAPACITY	250 Litres
DRY WEIGHT	39 KG
INSULATION THICKNESS	NONE
MATERIAL	GRP



SCALE: 1:15	SHEET 1 OF 1
-------------	--------------