





## The DPT Pressurisation Set


## Features:

- Easy setup and use.
- Flexible connections (Left & Right side).
- System Safety and Lock Feature.
- Customisable home screen allows company details to be displayed.
- Option to display customised contact details with alarm notification.
- Single controller for 2 circuits.
- Single and dual pump option.
- Automatic change over on pump fault
- Remote BMS option with customisable volt free contacts.
- Robust steel enclosure
- Error history Log
- Hi and Low Level Alarm

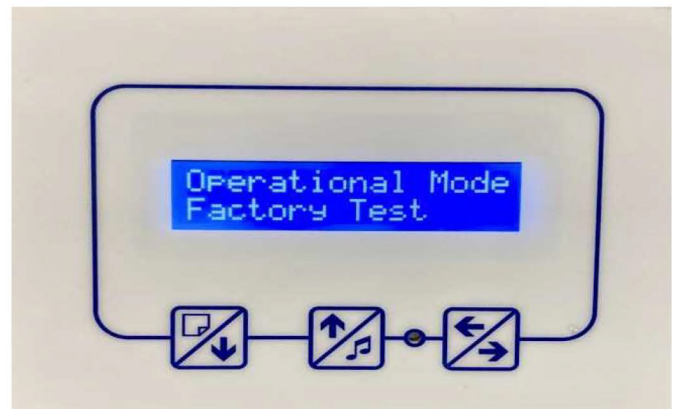

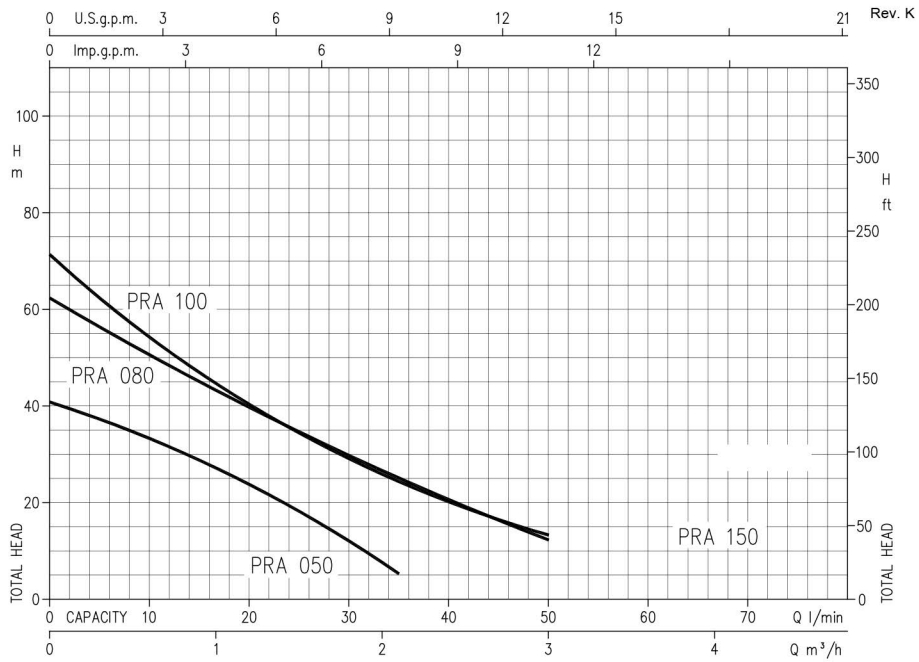

Pump Type		Power		Q=Capacity										
Single phase	Three phase	[kW]	[HP]	H=Total manometric head in meters										
				l/min m³/h	0	5	10	15	20	35	50	65	70	
PRA 0.50 M	PRA 0.50	0.37	0.5	40.5	37	33.3	28.7	23.7	5	-	-	-	-	-
PRA 0.80 M	PRA 0.80	0.6	0.8	62	56	50.7	45.1	39.8	25	12	-	-	-	-
PRA 1.00 M	PRA 1.00	0.75	1	71	62	54.4	47	40.4	24.3	13	-	-	-	-

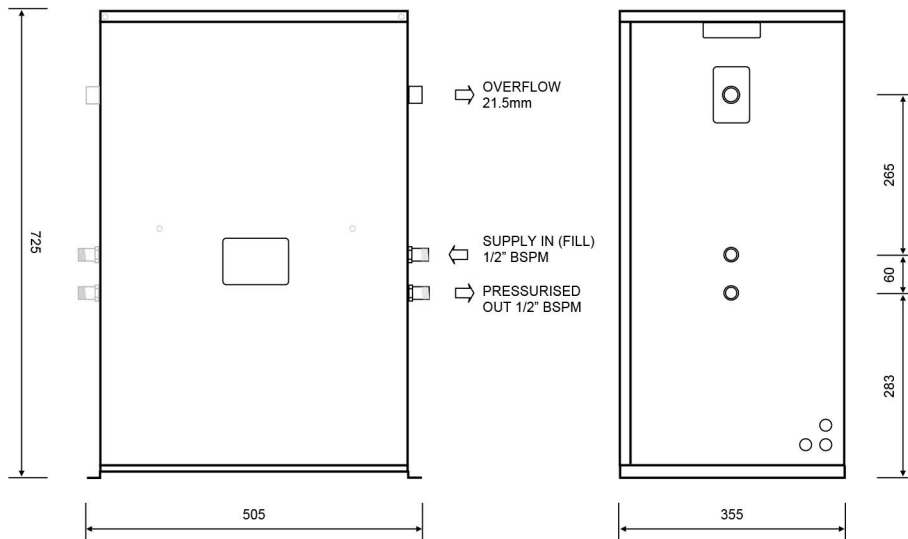

All dimensions in millimetres (mm)



Direct Pumps and Tanks Ltd  
Unit 12 Cossall Industrial Estate  
Ilkeston  
Derbyshire  
DE7 5UA  
Tel: 0115 9444474  
Email: [info@dpandt.co.uk](mailto:info@dpandt.co.uk)