

TITLE
CUCOMP.9000-4500

DRAWN BY J. Ellison DATE 17/06/2022

CUSTOMER CUSTOMER

NOTE:
All tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:
CUCOMP.9000-4500.AG Airgap Combination Unit




A4

ALL DIMENSIONS IN MM - DO NOT SCALE


DATE	VERSION	NOTES
08/03/2022	A	FIRST ISSUE

TANK SPECIFICATION :	
WET COMPARTMENT	1500 x 2000 x 1500mm
DRY COMPARTMENT	1500 x 2000 x 1500mm
EXTERNAL DIMENSIONS	3192 x 2192 x 1618mm
NOMINAL CAPACITY	4500 Litres
INSULATION THICKNESS	25mm
MATERIAL	GRP

SCALE:1:40 SHEET 1 OF 2

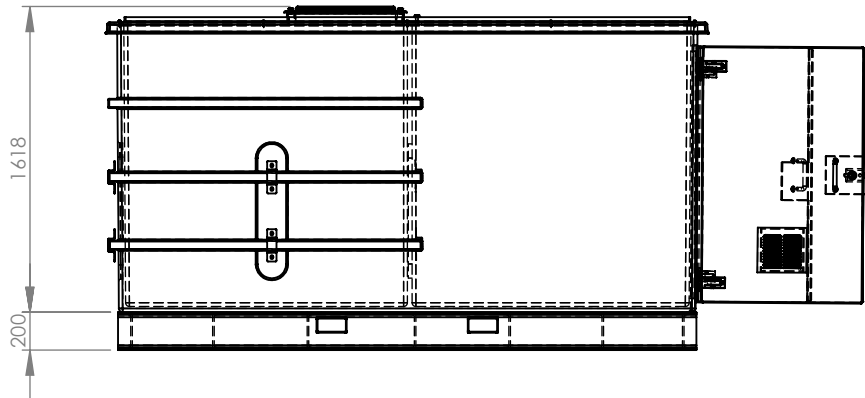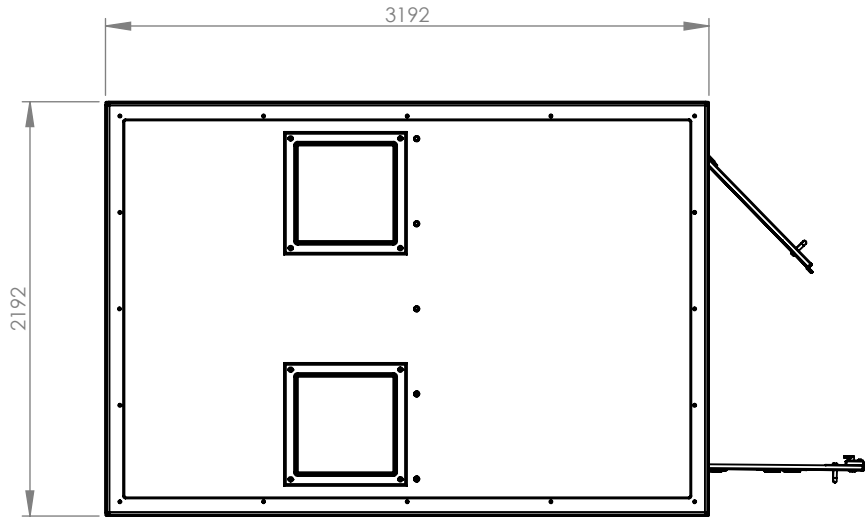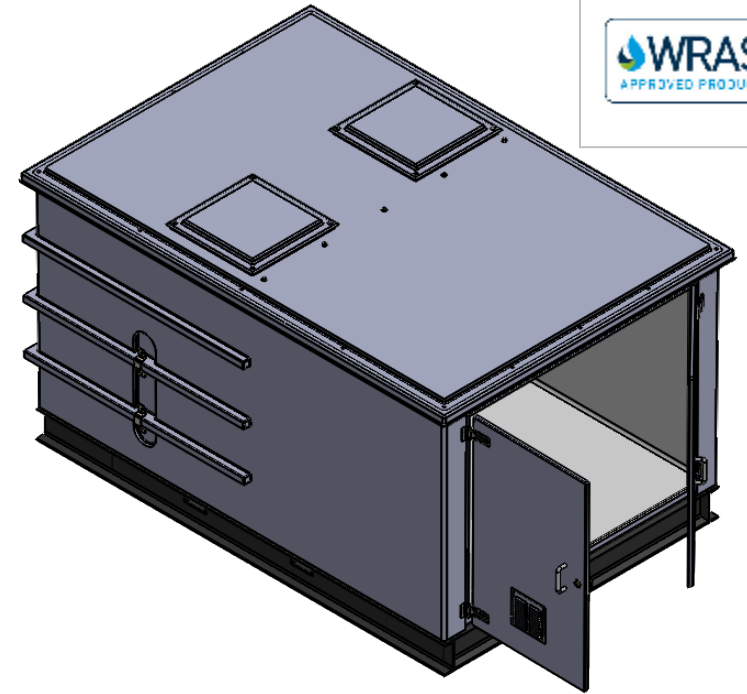

Access double door

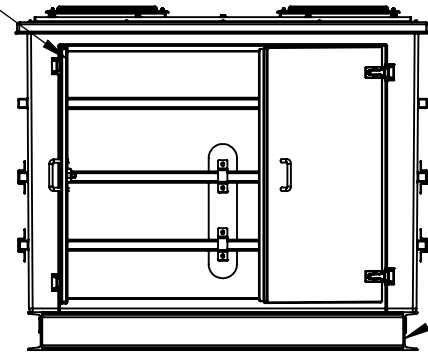

Optional skid

TITLE
CUCOMP.9000-4500
 c/w skid
 DRAWN BY J. Ellison DATE 17/06/2022
 CUSTOMER CUSTOMER

NOTE:
 All tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.
 ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

DESCRIPTION:
 CUCOMP.9000-4500.AG Airgap Combination Unit c/w steel skid
 A4 ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
08/03/2022	A	FIRST ISSUE

TANK SPECIFICATION :	
WET COMPARTMENT	1500 x 2000 x 1500mm
DRY COMPARTMENT	1500 x 2000 x 1500mm
EXTERNAL DIMENSIONS	3192 x 2192 x 1818mm
NOMINAL CAPACITY	4500 Litres
INSULATION THICKNESS	25mm
MATERIAL	GRP



SCALE:1:40 SHEET 2 OF 2