



IP56 Junction Box

Studding to added to rear of box for mounting, must not effect IP rating, (M5 x 30mm 2 pos min)




4 Core Motor Cable suitable for use in a sewage treatment plant (1.5m long)

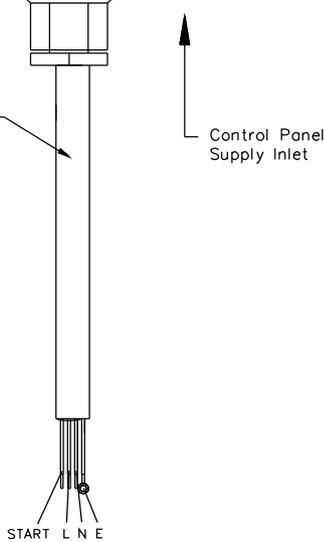


INSIDE JUNCTION BOX

2.3µF Motor Start Capacitor

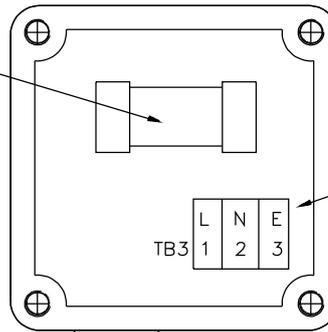

Terminal Block to suit maximum 2.5mm cable and to be labelled as shown

Strip Back 15mm Tin or ferrule ends Strip Back 15mm M4 Eyelet Required

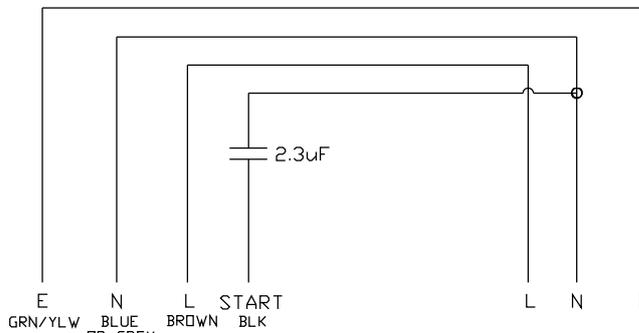

Control Panel Supply
220/240 VOLTS 1PH 50Hz

Wires to be marked -

E GRN/YLW
N BLUE OR GREY
L BROWN
START BLK

E GR BK WH
To Motor Gearbox

NOTES; -

1. Motor Starting Capacitor pre-fitted to capacitor box

ALL DIMENSIONS ARE IN MILLIMETRES - DO NOT SCALE



TITLE
CAPACITOR
JUNCTION
BOX

03			
02	21.01.26	VK	ECN 2287
01	24.08.12	JMcM	CC1074 & CC940 (Newco Coded)
ISSUE	DATE	DRAWN	MODIFICATION

SCALE NTS SHEET SIZE -

DRAWING No.

010846

This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Klargester. KLARGESTER RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

